


rechargeable lantern and remote

567362

lantern - tube replacement and operational instructions

replace with a 7W U-type energy saving tube

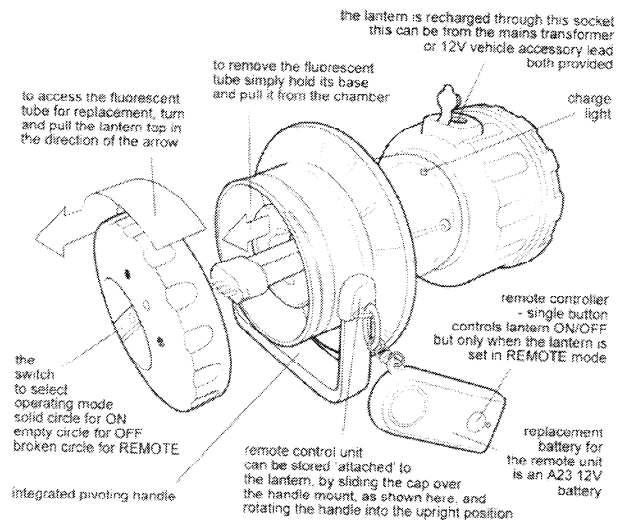

SAFETY GUIDELINES:

Keep out of the reach of children.
Do not use in wet conditions.
Store in a clean, dry environment.
Do not use if this unit is damaged in any way.
Never short the terminals of the internal battery together.
Never attempt to change the bulb when the battery is charging.
Do not expose the battery to fire or high temperature - the battery may explode.
Never look directly into the light.
Do not attempt to disassemble the battery or remove any parts from the battery terminals.
Before disposing of this product, protect exposed terminals

CHARGING THE INTERNAL BATTERY:

- The internal battery will need an initial charge of approximately 12-14 hours before first use.
- Subsequent recharging will take approximately 4-6 hours
- While charging, the charge light (red) in the floor of the lantern chamber will glow - this light only indicates that the lantern is connected to a power supply, it does not indicate a level or state of charge.
- The internal battery should only be charged using either of the accessories provided.
- Always recharge the lantern battery in a well ventilated area.
- The lantern switch must be in the 'off' position while charging
- Avoid charging the internal battery at temperatures below 4°C or above 40°C.
- The lantern should be kept fully charged when not in use. If it is stored then it should be recharged every 3 months. Always ensure that the switch is in the 'off' position when not in use.
- If the charge is very low, the battery will take approximately 6 hours to reach maximum capacity when using the supplied mains adaptor. However, a 4 hour charge will provide a useable amount of charge.
- The battery will also charge from the 12V vehicle socket using the lead provided. It is recommended that it is not left in this mode of charging for longer than 3 hours. Charging should be done with the engine running to prevent running down the charge on the vehicles battery.
- When charging is complete, you must disconnect from the mains/car socket before unplugging the DC jack from the torch.
- There is no indication that the battery is charging or is fully charged.
- Do not charge continuously for a period longer than 24 hours.
- It is advisable to recharge the lantern after each use.
- The battery charge does not have to be fully depleted before recharging.
- Failure to re-charge the lantern every 3 months may permanently damage or reduce the performance of the spotlight.
- The lifespan of the internal battery is dependant on how it is treated; the more it is used the longer it should last. It is not possible to predict how long the battery will last but approximately 40 charge and discharge cycles should be expected from a well maintained battery.

BEFORE USING YOUR LANTERN PLEASE ENSURE THAT YOU READ THESE MAINTENANCE, CARE AND OPERATING INSTRUCTIONS FULLY. PLEASE ALSO RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.